


LTD 增量式磁栅编码器
LTD INCREMENTAL MAGNETIC GRID ENCODER

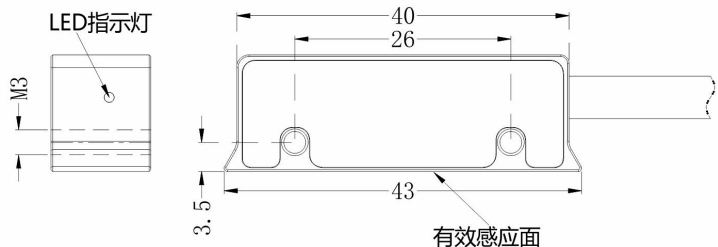

标注单位: mm

性能和优势

- 高性价比
High cost performance
- 智能告错指示灯
Intelligent error indicator light
- 高品质连接线, 编织屏蔽线, 耐折弯, 耐磨, 抗干扰
High quality wiring, braided shielding wire, bending resistance, abrasion resistance, anti-interference
- 小体积, 高分辨率
Small size, high resolution
- 高输出频率 8000KHz
High output frequency 8000KHz
- 非接触式测量, 耐灰尘, 耐磨损, 耐冲击, 抗振动, 抗磁场干扰
Non-contact measurement, dust resistance, wear resistance, impact resistance, vibration resistance, magnetic field interference resistance

产品技术参数

特性 (Characteristic)	技术参数 (Technical parameter)
供电电压 (Supply Voltage)	5V +/-5%
磁间距 (Magnetic spacing)	2+2mm
分辨率 (Resolving power)	1μm
重复精度 (Repetition accuracy)	±2μm
输出频率 (Output frequency)	1000KHz
速度 (Speed)	4m/s
线缆 (Cable)	8芯屏蔽线 (8-core shielded wire)
接线方式 (Wiring method)	直接出线 (Direct outgoing)
输出形式 (Output form)	RS422
LED状态指示 (LED status indication)	红/绿色 (Red/green)
电流 (Electric current)	小于50mA (Less than 50 mA)
可订制参数 (Customizable parameters)	分辨率, 输出频率, 计数方向, 线缆长度 (≤15米) Resolution, output frequency, counting direction, cable length (≤15m)
防护等级 (Protection Class)	IP67